

Superelevation

Design Manual
Chapter 2
Alignments

Originally Issued: 08-29-24

Table of Contents

| | | |
|------|-----------------------------|----|
| 2B-1 | Quick Tips | 1 |
| 2B-2 | Superelevation (e) | 2 |
| 2B-3 | Superelevation Tables | 11 |

2B-1 Quick Tips

- For roadways with a design speed greater than 45 mph, use distribution Method 5. Superelevation rate should be no greater than 6% for new construction.
- For roadways with a design speed of 45 mph or less, use distribution Method 2. Even though this is the Design Bureau's best practice, this method may be optional for urban roadways.
- Submit design exceptions for superelevation rates that are less than the values shown in the superelevation tables in Section [2B-3](#).

2B-2 Superelevation (e)

Superelevation is the banking of a roadway along a horizontal curve. An adequate superelevation will allow motorists maneuver a curve at reasonable speeds safely and comfortably. Design a steeper superelevation rate if speeds increase, or horizontal curves become tighter.

In Iowa the superelevation rate is limited to a maximum of 8%. This reduces the risk of slow moving vehicles sliding down a superelevated roadway during winter conditions. For new construction, the superelevation rate is limited to 6%, which allows the shoulders to slope away from the driving lanes without exceeding AASHTO's 8% maximum value for crossover breaks. The superelevation rate for new urban facilities is usually limited to 4% due to the frequency of cross streets, driveways, and entrances adjoining the curve, as well as the possibility of vehicles stopping on the curve at signalized intersections.

See Section [1C-1](#) to select the design criteria for maximum superelevation rates for 3R projects and new construction or reconstruction projects.

Definitions

Side Friction - the friction force between a vehicle's tires and the pavement which prevents the vehicle from sliding off the roadway.

Axis of Rotation - the point on the cross section about which the roadway is rotated to attain the desired superelevation.

Superelevation Rate (e) - the cross slope of the pavement at full superelevation.

Superelevation Runoff Length (L) - the length required to change the cross slope from 0% to the full superelevation rate.

Tangent Runout Length (x) - the length required to change the cross slope from 0% to the normal cross slope.

Relative Gradient (G) - the slope of the edge of pavement relative to the axis of rotation.

Width (w) - the distance from the axis of rotation to the outside edge of traveled way.

Figure 2B.1 shows these definitions graphically.

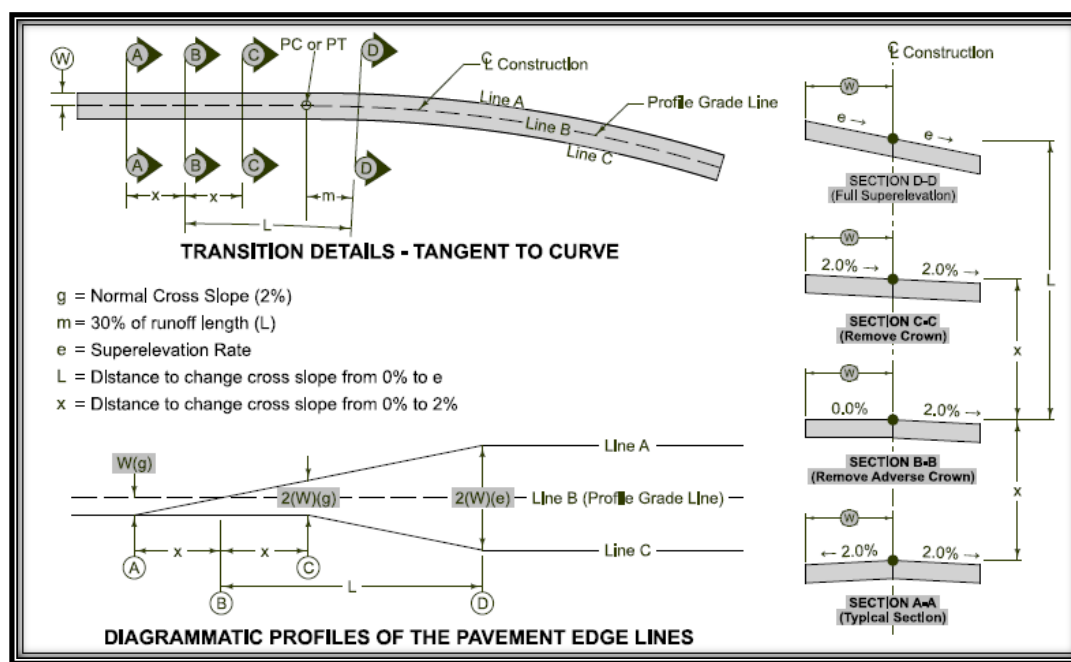


Figure 2B.1: Graphical definitions of superelevation terms for a two-lane roadway.

See Standard Road Plans [PV-300 Series](#) for superelevation details.

Side Friction Factor

Superelevation rate and side friction demand, also referred to as the side friction factor, establish radii for horizontal curves. Side friction factor represents the friction between the tires and pavement surface. This friction results in a lateral acceleration that acts upon a vehicle, and which occupants within the vehicle can feel. Like superelevation, side friction factor is limited for design speeds.

Maximum Side Friction Factors (f_{max})

Consider the vehicle's need to side friction, and driver comfort, when establishing the maximum side friction factor to use for horizontal curve design.

Side Friction (vehicle's need)

A vehicle will begin to skid when the side friction demand equals or exceeds the maximum amount of friction that can be developed between the tires and the pavement. This maximum friction, with a factor of safety to account for variations in the speed, tire conditions, and pavement conditions, is the maximum design friction factor based upon vehicle need.

Side Friction (driver comfort)

Through a horizontal curve, drivers can experience a feeling of being pushed outward. If this feeling becomes uncomfortable, the driver will compensate by flattening out their path or braking, or both, to reduce lateral acceleration to an acceptable level. Often, the driver's comfort determines superelevation requirements, not the vehicle and roadway characteristics. On low speed roadways, drivers will accept more lateral acceleration, thus permitting a larger side friction factor. As speed increase, drivers become less tolerant of lateral acceleration, requiring a reduction in side friction factor.

Based upon research of the above factors, Table 2B.1 lists maximum side friction factors for use in design of horizontal curves.

Table 2B.1: Maximum side friction factors (f_{max}).

| Design Speed (mph) | f_{max} | Design Speed (mph) | f_{max} |
|-----------------------|-----------|-----------------------|-----------|
| 15 | 0.32 | 50 | 0.14 |
| 20 | 0.27 | 55 | 0.13 |
| 25 | 0.23 | 60 | 0.12 |
| 30 | 0.20 | 65 | 0.11 |
| 35 | 0.18 | 70 | 0.10 |
| 40 | 0.16 | 75 | 0.09 |
| 45 | 0.15 | 80 | 0.08 |

Source: Adapted from Table 3-7: AASHTO Greenbook, 7th edition, 2018.



Curves should not be designed with side friction factors greater than the values shown in Table 2B.1.

Distribution of Superelevation (e) and Side Friction (f)

Chapter 3 of the [AASHTO Greenbook](#) discusses five methods of controlling lateral acceleration on curves using e , f , or both. Iowa DOT uses distribution Method 2 and Method 5 depending on the type of roadway.

Low Speed Roadways

Method 2 is commonly used for low speed roadways. With Method 2, side friction is primarily used to control lateral acceleration, and superelevation is added to radii after the maximum side friction factor has been used. Superelevation is not needed for radii that require less than the maximum friction factors shown in Table 2B.1.

Distribution Method 2 increases the lateral acceleration, creating some additional discomfort to the driver for some curves.

In urban areas, drivers are willing to accept more discomfort due to the anticipation of more critical conditions. In addition, several factors make it difficult, if not impossible, to apply superelevation to urban roadways:

- Frequency of cross streets and driveways.
- Vehicles stopping on curves at signalized intersections.
- Meeting the grade of adjacent properties.
- Surface drainage.
- Pedestrian ramps.
- Wider pavement area.

High Speed Roadways

Method 5 is used for high speed roadways. With Method 5, side friction and superelevation are both applied using a curvilinear relationship with the inverse of the radius.

At higher speeds, drivers are less comfortable with lateral acceleration through curves. Method 5 works well for determining the distribution of superelevation and side friction for high speed roadways because superelevation is progressively added as speed increases.

Superelevation tables for high speed roadways are included in Section [2B-3](#). The superelevation rate for Method 5 distribution can also be calculated manually using the equations provided in Chapter 3 of the [AASHTO Greenbook](#). An excel file has been created using these formulas and is accessed using the link below.

[Superelevation Spreadsheet](#)

Note: When calculating superelevation rates manually, round values of e up to the nearest 2/10ths of a percent for new construction. AASHTO notes precision greater than 2/10ths of a percent is not necessary.

Ramps

Method 2 superelevation distribution is also well suited for curves on ramps near at-grade terminals. Curves near at-grade terminals are usually short, and drivers are traveling at reduced speeds.

The relationship between superelevation rate and minimum radius for Method 2 distribution can be expressed as follows:

$$R = \frac{V^2}{15(0.01e + f_{max})}$$

where:

V = design speed, mph

e = superelevation rate, %

f_{max} = maximum friction factor for the design speed

R = Radius of the curve, feet

Superelevation table 10 on Section [2B-3](#) provides minimum turning radii for various superelevation rates and design speeds, based upon Method 2 distribution.

Method 5 superelevation distribution should be used for curves on ramps near free flow terminals and curves on directional and semi-directional ramps.

Axis of Rotation

The axis of rotation is the point on the cross section about which the roadway is rotated to attain the desired superelevation. For standard situations, the axis of rotation is shown on the appropriate Standard Road Plan [PV-300 Series](#).



For cases not covered by the Standards, the axis of rotation should be clearly shown on the typical cross section and modified superelevation detail.

Undivided Roadway

Undivided roadways should be superelevated with the axis of rotation at the roadway's centerline (see Figure 2B.2).

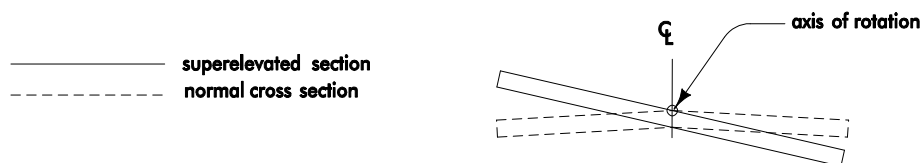


Figure 2B.2: The axis of rotation for undivided highways.

Highways with painted medians are rotated about the centerline.

Divided Roadways

Depressed Medians

Multi-lane roadways with depressed medians should be superelevated with the axis of rotation at the median edges of the traveled way (see Figure 2B.3). With this method, the cross section of the median remains relatively uniform. This method is also used for two lane roadways that will ultimately become one direction of a divided highway.

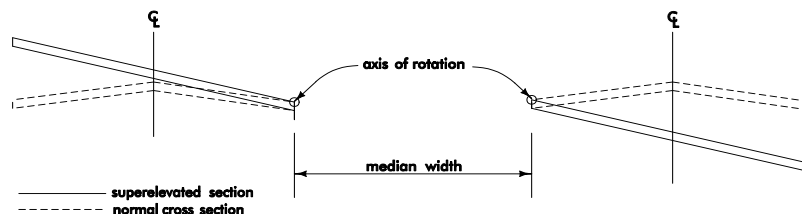


Figure 2B.3: The axis of rotation for multilane highways with depressed medians.

Although the AASHTO Greenbook suggests moving the axis of rotation back to the roadway centerlines for wider medians, the Design Bureau's policy is to keep the axis of rotation at the median edge of the traveled way, regardless of the median width. This method may require additional earthwork, but it is preferred for reasons of constructability, simplicity of design, and the appearance of a uniform median cross section. Facilities that have wide medians with independent profile grades and/or construction centerlines may be treated as two lane (undivided highways) if the resulting median cross section is acceptable.

Closed Medians

Roadways with closed medians (concrete barrier rail) should be superelevated with the axis of rotation at the inside edge of the travel way with the profile grade at the centerline of the roadway. Maintaining a uniform cross section for the median pad is preferred to simplify design and construction by having a roadway without a split median barrier.

With this method, to maintain a uniform median pad cross section and to maintain high side and low side shoulder treatments described in Section [3C-3](#), the axis of rotation profile reference line does not coincide with the profile grade line. The axis of rotation profile reference line is also not shown as a horizontal line like other roadways without a closed median. See Standard Road Plans [PV-300 Series](#) details.

Ramps

The axis of rotation for ramps should be at the baseline. The baseline is usually located to the right of the direction of travel.

Superelevation Transitions

To provide comfort and safety, superelevation should be introduced and removed uniformly. The distance required to transition into an out of superelevation is a function of the relative gradient, width of pavement rotated and superelevation rate.

Relative Gradient

The slope of the edge of pavement relative to the axis of rotation is referred to as the relative gradient (G). Figure 2B.4 shows the relationship between superelevation runoff (L), superelevation (e), and pavement width (w).

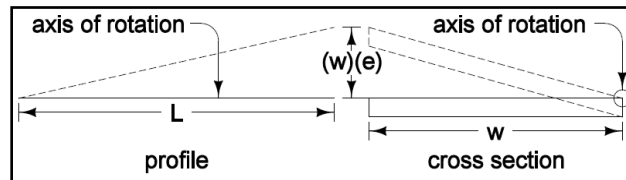


Figure 2B.4: Runoff length and superelevation.

From Figure 2B.4, the following formula can be derived:

$$G = \frac{w \times e}{L}$$

where:

G = relative gradient (%)

w = lane width (ft.)

e = full superelevation (%)

L = runoff length (ft.)

Maximum design values for the relative gradient are shown in Table 2B.2.

Table 2B.2: Maximum relative gradients.

| Design Speed (mph) | Maximum Relative Gradient, %, (and Equivalent Maximum Relative Slopes) for profiles between the edge of a two-lane roadway and the axis of rotation | |
|-----------------------|--|-----------------------------------|
| | Maximum Relative Gradient (G) | Equivalent Maximum Relative Slope |
| 15 | 0.89 | 1:112.5 |
| 20 | 0.80 | 1:125 |
| 25 | 0.73 | 1:137.5 |
| 30 | 0.67 | 1:150 |
| 35 | 0.62 | 1:162.5 |
| 40 | 0.57 | 1:175 |
| 45 | 0.53 | 1:187.5 |
| 50 | 0.50 | 1:200 |
| 55 | 0.50 | 1:200 |
| 60 | 0.50 | 1:200 |
| 65 | 0.50 | 1:200 |
| 70 | 0.50 | 1:200 |
| 75 | 0.50 | 1:200 |
| 80 | 0.50 | 1:200 |

Source: Derived from AASHTO Greenbook 2018, page 3-62

Superelevation Runoff Length

Runoff length is the length required to transition the outside lane(s) of the roadway from a zero (flat) cross slope to full superelevation, or vice versa. The following formula is used to determine the runoff length.

$$L = \frac{12e}{G} \alpha$$

where:

L = runoff length (ft.)

e = full superelevation (%)

G = Relative gradient (%)

α = adjustment factor (dimensionless) to account for the number of lanes being rotated.

The adjustment factor α for different roadway widths can be calculated manually using the following equation:

$$\alpha = 1 + 0.0417(w - 12)$$

where:

w = the distance from the axis of rotation to the outside edge of traveled way (ft).

See Table 2B.3 for adjustment factors for common roadway widths.

Table 2B.3: Adjustment factor for common roadway widths.

| Roadway Type | α |
|---|----------|
| two lane undivided (w = 12 ft) | 1.00 |
| four lane divided (w = 24 ft) | 1.50 |
| six lane divided (w = 36 ft) | 2.00 |
| six lane divided with inside shoulder (w = 46 ft) | 2.42 |
| eight lane divided (w = 48 ft) | 2.50 |
| eight lane divided with inside shoulder (w = 58 ft) | 2.92 |
| standard ramp (w = 16 ft) | 1.17 |
| standard loop (w = 18 ft) | 1.25 |

Source: Derived from AASHTO Greenbook 2018, page 3-64

Runout Length

The runout length (x) is the length required to transition the outside lane(s) of the roadway from a normal crowned section to a point where the outside lane(s) have zero (flat) cross sloped, known as the point where the roadway removes adverse crown. For consistency, the same relative gradient is used. This means the ratio of the runout length to the runoff length is the same as the ratio of the normal cross slope to the full superelevation runoff.

$$\frac{x}{L} = \frac{g}{e}$$

where:

x = runout length, feet

L = superelevation runoff length, feet

g = normal cross slope, %

e = full superelevation, %

From this, the runout length is determined as:

$$x = \frac{g}{e} L$$

where x , L , g , and e are as explained above.

Placing Superelevation Transition

How superelevation transition is placed is critical to driver safety and comfort. If all the transition is placed prior to the curve, the driver, while on the tangent, is forced to steer in a direction opposite the curve to avoid drifting into opposing lanes. If all the superelevation transition is placed in the curve, the lateral acceleration the driver experiences upon entering the curve may be intolerable. In addition, side friction may not be sufficient to prevent the vehicle from skidding off the road.

The Design Bureau's practice is to place 70 percent of the superelevation runoff length on the tangent section of the roadway and 30 percent on the curve. The variable (m) in the Standard Road Plans represents the 30 percent of the superelevation runoff developed on the curve. Superelevation at the PC or PT of a curve is equal to $0.70(e)$.

Other proportions (50 percent to 80 percent) of the runoff length placed on the tangent section are acceptable where site conditions do not allow 70 percent. If site conditions require this, the designer must include a detail sheet in the plans outlining the nonstandard proportion.

Auxiliary Lanes

Low Side of Superelevated Roadways

Acceleration lanes on the low side of a superelevated roadway should have the same cross slope as the adjacent pavement and match the superelevation rate of transition.

High Side of Superelevated Roadways

Acceleration lanes on the high side of a superelevated roadway preferably should have the same cross slope as the adjacent pavement. Normally the cross slope of an acceleration lane will need to transition downward from the adjacent pavement near an intersection, creating a crossover crown line. Desirably the algebraic difference in the crossover crown line should be limited to 4 or 5 percent. Table 2B.4 suggests the maximum differences in crossover crown lines, related to the speed of the turning roadway at an intersection.

Table 2B.4: Maximum algebraic difference in cross slope at turning roadway terminals.

| Design speed of exit or entrance curve (mph) | Maximum algebraic difference in cross slope at crossover line (%) |
|--|---|
| 20 and under | 5.0 to 8.0 |
| 25 and 30 | 5.0 to 6.0 |
| 35 and over | 4.0 to 5.0 |

Source: AASHTO Greenbook, 7th edition, 2018 Table 9-18

Cross Slope Transition

Preferably the cross slope rate of transition for the auxiliary lane should equal the cross slope rate of transition of the adjacent pavement. In areas near an intersection, a faster rate of transition may be desirable.

Designers should refer to Table 2B.2 for the maximum grade change in the profile edge of pavement to determine the maximum rate of transition per station.

Example: If the design speed of the limiting curve of a turning roadway has a design speed of 15 mph, the relative gradient of the edge of pavement is 0.89 (1:112.5). This results in a rate of change in cross slope of 7.4% for a 12 foot lane per station (100 ft).

$$\frac{L \times G}{w} = \frac{100 \times 0.89}{12} = 7.4\%$$

Shoulder Treatment in Superelevated Curves

Low Side Shoulders

Shoulders on the low side of superelevated roadways should slope away from the roadway. The normal cross slope of the shoulder should be maintained until the cross slope of the roadway exceeds the normal shoulder cross slope. The transition of the shoulder cross slope should equal the transition rate of the roadway.

For example, if the mainline pavement is superelevated at 5%, the low side shoulder would slope away at 5%. The shoulder cross slope transition would begin where the mainline pavement cross slope equals the normal cross slope of the shoulder and transition at an equivalent superelevation transition rate.


High Side Shoulders

Shoulders on the high side of superelevated curves should slope away from the roadway. The normal cross slope of the shoulder should be maintained until the algebraic difference between the cross slope of the shoulder and the cross slope of the roadway reaches 8%. Once the algebraic difference in cross slope reaches 8%, the shoulder cross slope should transition up at an equivalent transition rate as the adjacent roadway to maintain the 8% algebraic difference. For example, if the mainline pavement is superelevated at 6%, the high side shoulder should slope away at 2%.

If the superelevation rate exceeds 7%, maintain a 1% shoulder cross slope away from the adjacent pavement. For example, if the mainline pavement is superelevated at 8%, the high side shoulder should slope away at 1%.

Superelevation Transition Considerations for Pavement Drainage

To achieve superelevation, the pavement surface must rotate through an area of zero cross slope. These areas of zero cross slope are critical for consideration. These areas can occur at or near where the forces exerted by a vehicle are changing due to a change in the vehicle path. If this occurs in a flat area within the profile, the result can be an area of pavement that does not drain well. This can occur near the turning point of a crest or sag, or within a tangent section of profile. In this case, the transition edge slope ratio acts with the profile to create almost a flat area.

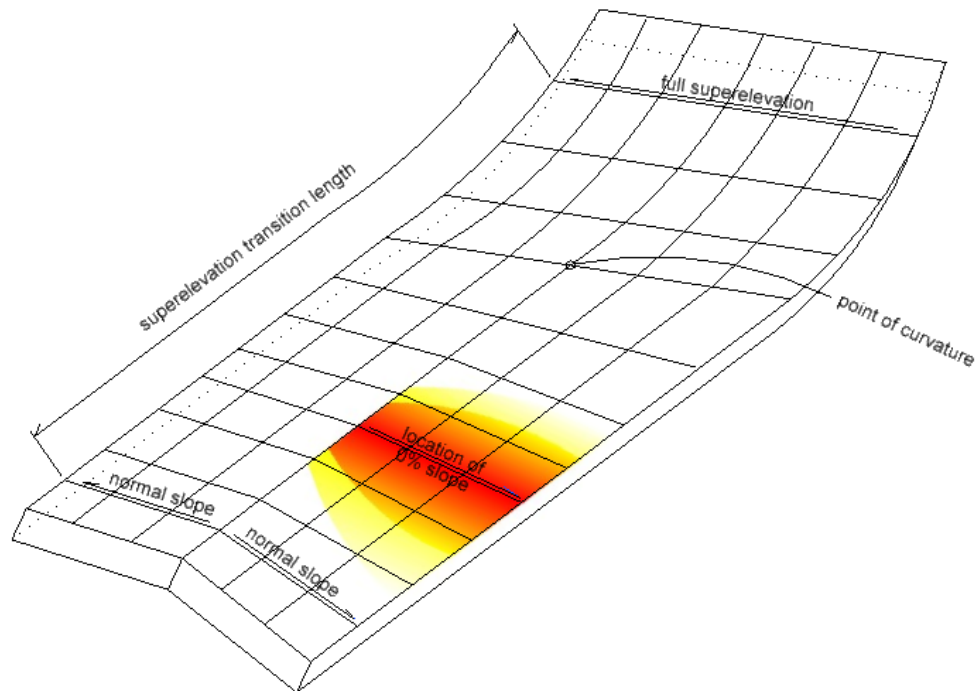

Designers should avoid these situations as much as possible by:

- Providing adequate running slope.
- Avoiding placing the flat location of a vertical curve coincident with the area of no cross slope.

On some occasions, project constraints make this occurrence necessary. In these locations, designers should be aware of the implications this holds.

Newly placed pavement will provide adequate surface friction in areas of no cross slope. However, as the surface wears over time, the loss of surface friction can result in undesirable conditions.

A tool has been developed to assist with the review of these areas. See Section [21M-51](#).

The output provided by this tool should be saved as project documentation for both ends of every superelevated curve within a project.

2B-3 Superelevation Tables

Table 1: Low Speed, Two Lane Undivided Roadways ($w = 12$ feet), $e_{\max} = 6\%$, $NC = 2\%$

Table 2: High Speed, Two Lane Undivided Roadways ($w = 12$ feet), $e_{\max} = 6\%$, $NC = 2\%$

Table 3: High Speed, Four Lane Divided Roadways ($w = 24$ feet), $e_{\max} = 6\%$, $NC = 2\%$

Table 4: High Speed, Six Lane Divided Roadways ($w = 36$ feet), $e_{\max} = 6\%$, $NC = 2.5\%$

Table 5: High Speed, Eight Lane Divided Roadways ($w = 48$ feet), $e_{\max} = 6\%$, $NC = 2.5\%$

Table 6: Ramps ($w = 16$ feet) and Loops ($w = 18$ feet), $e_{\max} = 6\%$, $NC = 2\%$

Table 7: Ramps ($w = 24$ feet), $e_{\max} = 6\%$, $NC = 2\%$

Table 8: Low Speed Roadways ($w = 12$ feet), $e_{\max} = 8\%$, $NC = 2\%$

Table 9: High Speed Roadways ($w = 12$ feet), $e_{\max} = 8\%$, $NC = 2\%$

Table 10: Minimum Radii, Low Speed Roadway

The Design Bureau uses Superelevation Tables 1 through 10 to determine the following:

- Minimum radii for design superelevation rates in feet (ft).
- Minimum superelevation runoff length (L) in feet (ft).
- Minimum tangent runout length (x) in feet (ft).

Values of L and x are rounded to the nearest foot. Values of e are rounded up to the nearest two-tenths of a percent (%). L and x for a given design speed should not be less than the minimums indicated on the tables. Tangent runout length is based on a normal cross slope (NC), of either 2 or 2.5 (%). See Superelevation Transitions in Section 2B-2, to determine tangent runout lengths for normal cross slopes other than 2 or 2.5 (%).

When using superelevation tables for a given radius, interpolation is not necessary because the superelevation rate should be determined for a radius equal to, or slightly smaller than the desired radius.

Example: The roadway is a two lane undivided roadway with a NC of 2%. What would be the design superelevation rate for a 50 mph curve given a maximum superelevation rate (e_{\max}) of 6% and a calculated radius of 2,120 (ft).?

Method: See Figure 2B.5

From Superelevation Table 2, under the 50 mph, select 2,110 feet, which is a radius slightly smaller than 2,120 feet. The superelevation rate is 4.2%, L is 101 feet, and x is 48 feet.

| | Design Speed | | | | | |
|-------|--------------|--------|-------------|--------|-------------|--------|
| (mph) | 50 | | 55 | | 60 | |
| (ft) | x = 48 | | x = 48 | | x = 48 | |
| e (%) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) |
| NC | 7870 | ---- | 9410 | ---- | 11100 | ---- |
| RC | 5700 | 48 | 6820 | 48 | 8060 | 48 |
| 2.2 | 5100 | 53 | 6110 | 53 | 7230 | 53 |
| 2.4 | 4600 | 58 | 5520 | 58 | 6540 | 58 |
| 2.6 | 4170 | 62 | 5020 | 62 | 5950 | 62 |
| 2.8 | 3800 | 67 | 4580 | 67 | 5440 | 67 |
| 3.0 | 3480 | 72 | 4200 | 72 | 4990 | 72 |
| 3.2 | 3200 | 77 | 3860 | 77 | 4600 | 77 |
| 3.4 | 2940 | 82 | 3560 | 82 | 4250 | 82 |
| 3.6 | 2710 | 86 | 3290 | 86 | 3940 | 86 |
| 3.8 | 2490 | 91 | 3040 | 91 | 3650 | 91 |
| 4.0 | 2300 | 96 | 2810 | 96 | 3390 | 96 |
| 4.2 | 2110 | 101 | 2590 | 101 | 3140 | 101 |
| 4.4 | 1940 | 106 | 2400 | 106 | 2920 | 106 |
| 4.6 | 1780 | 110 | 2210 | 110 | 2710 | 110 |
| 4.8 | 1640 | 115 | 2050 | 115 | 2510 | 115 |
| 5.0 | 1510 | 120 | 1890 | 120 | 2330 | 120 |
| 5.2 | 1390 | 125 | 1750 | 125 | 2160 | 125 |
| 5.4 | 1280 | 130 | 1610 | 130 | 1990 | 130 |
| 5.6 | 1160 | 134 | 1470 | 134 | 1830 | 134 |
| 5.8 | 1040 | 139 | 1320 | 139 | 1650 | 139 |
| 6.0 | 833 | 144 | 1060 | 144 | 1330 | 144 |

Figure 2B.5: Determine superelevation (e).

Superelevation Tables 1 and 2 provide values of (L) and (x) for roadways with an e_{\max} of 6% and a pavement width of 12 feet.

Superelevation Tables 8 and 9 provide values of (L) and (x) for roadways with an e_{\max} of 8% and a pavement width of 12 feet. These tables are primarily used for 3R and 4R projects.

Superelevation Table 10 contains values for a range of superelevation rates for low speed roadways, for which Method 2 is used to distribute side friction and superelevation.

Table 2B.3 provides a method on how to use the adjustment factor (α) to determine values of (L) and (x) for roadway widths other than 12 feet. Multiply the values of (L) and (x) obtained from the tables by the appropriate adjustment factor (α).



Do not use superelevation rates less than the values shown in the tables for a given radius. Designers may exceed the values shown but should consult with the [Geometrics Coordinator](#) in the Methods Section.

Table 1: Low Speed, Two Lane Undivided Roadways (w = 12 feet), $e_{\max} = 6\%$, NC = 2%

| | Design Speed | | | | | | | | | |
|------------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|
| (mph) | 25 | | 30 | | 35 | | 40 | | 45 | |
| (ft) | x = 33 | | x = 36 | | x = 39 | | x = 42 | | x = 45 | |
| e (%) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) |
| NC | 2290 | ---- | 3130 | ---- | 4100 | ---- | 5230 | ---- | 6480 | ---- |
| RC | 1630 | 33 | 2240 | 36 | 2950 | 39 | 3770 | 42 | 4680 | 45 |
| 2.2 | 1450 | 36 | 2000 | 40 | 2630 | 43 | 3370 | 46 | 4190 | 50 |
| 2.4 | 1300 | 40 | 1790 | 43 | 2360 | 47 | 3030 | 50 | 3770 | 54 |
| 2.6 | 1170 | 43 | 1610 | 47 | 2130 | 51 | 2740 | 55 | 3420 | 59 |
| 2.8 | 1050 | 46 | 1460 | 50 | 1930 | 55 | 2490 | 59 | 3110 | 63 |
| 3.0 | 944 | 50 | 1320 | 54 | 1760 | 59 | 2270 | 63 | 2840 | 68 |
| 3.2 | 850 | 53 | 1200 | 58 | 1600 | 62 | 2080 | 67 | 2600 | 72 |
| 3.4 | 761 | 56 | 1080 | 61 | 1460 | 66 | 1900 | 71 | 2390 | 77 |
| 3.6 | 673 | 59 | 972 | 65 | 1320 | 70 | 1740 | 76 | 2190 | 81 |
| 3.8 | 583 | 63 | 864 | 68 | 1190 | 74 | 1590 | 80 | 2010 | 86 |
| 4.0 | 511 | 66 | 766 | 72 | 1070 | 78 | 1440 | 84 | 1840 | 90 |
| 4.2 | 452 | 69 | 684 | 76 | 960 | 82 | 1310 | 88 | 1680 | 95 |
| 4.4 | 402 | 73 | 615 | 79 | 868 | 86 | 1190 | 92 | 1540 | 99 |
| 4.6 | 360 | 76 | 555 | 83 | 788 | 90 | 1090 | 97 | 1410 | 104 |
| 4.8 | 324 | 79 | 502 | 86 | 718 | 94 | 995 | 101 | 1300 | 108 |
| 5.0 | 292 | 83 | 456 | 90 | 654 | 98 | 911 | 105 | 1190 | 113 |
| 5.2 | 264 | 86 | 413 | 94 | 595 | 101 | 833 | 109 | 1090 | 117 |
| 5.4 | 237 | 89 | 373 | 97 | 540 | 105 | 759 | 113 | 995 | 122 |
| 5.6 | 212 | 92 | 335 | 101 | 487 | 109 | 687 | 118 | 903 | 126 |
| 5.8 | 186 | 96 | 296 | 104 | 431 | 113 | 611 | 122 | 806 | 131 |
| 6.0 | 144 | 99 | 231 | 108 | 340 | 117 | 485 | 126 | 643 | 135 |

[Return to Summary](#)

Table 2: High Speed, Two Lane Undivided Roadways (w = 12 feet), $e_{\max} = 6\%$, NC = 2%

| | Design Speed | | | | | | | | | | | |
|-------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|
| (mph) | 50 | | 55 | | 60 | | 65 | | 70 | | 75 | |
| (ft) | x = 48 | | x = 48 | | x = 48 | | x = 48 | | x = 48 | | x = 48 | |
| e (%) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) |
| NC | 7870 | ---- | 9410 | ---- | 11100 | ---- | 12600 | ---- | 14100 | ---- | 15700 | ---- |
| RC | 5700 | 48 | 6820 | 48 | 8060 | 48 | 9130 | 48 | 10300 | 48 | 11500 | 48 |
| 2.2 | 5100 | 53 | 6110 | 53 | 7230 | 53 | 8200 | 53 | 9240 | 53 | 10400 | 53 |
| 2.4 | 4600 | 58 | 5520 | 58 | 6540 | 58 | 7430 | 58 | 8380 | 58 | 9420 | 58 |
| 2.6 | 4170 | 62 | 5020 | 62 | 5950 | 62 | 6770 | 62 | 7660 | 62 | 8620 | 62 |
| 2.8 | 3800 | 67 | 4580 | 67 | 5440 | 67 | 6200 | 67 | 7030 | 67 | 7930 | 67 |
| 3.0 | 3480 | 72 | 4200 | 72 | 4990 | 72 | 5710 | 72 | 6490 | 72 | 7330 | 72 |
| 3.2 | 3200 | 77 | 3860 | 77 | 4600 | 77 | 5280 | 77 | 6010 | 77 | 6810 | 77 |
| 3.4 | 2940 | 82 | 3560 | 82 | 4250 | 82 | 4890 | 82 | 5580 | 82 | 6340 | 82 |
| 3.6 | 2710 | 86 | 3290 | 86 | 3940 | 86 | 4540 | 86 | 5210 | 86 | 5930 | 86 |
| 3.8 | 2490 | 91 | 3040 | 91 | 3650 | 91 | 4230 | 91 | 4860 | 91 | 5560 | 91 |
| 4.0 | 2300 | 96 | 2810 | 96 | 3390 | 96 | 3950 | 96 | 4550 | 96 | 5220 | 96 |
| 4.2 | 2110 | 101 | 2590 | 101 | 3140 | 101 | 3680 | 101 | 4270 | 101 | 4910 | 101 |
| 4.4 | 1940 | 106 | 2400 | 106 | 2920 | 106 | 3440 | 106 | 4010 | 106 | 4630 | 106 |
| 4.6 | 1780 | 110 | 2210 | 110 | 2710 | 110 | 3220 | 110 | 3770 | 110 | 4380 | 110 |
| 4.8 | 1640 | 115 | 2050 | 115 | 2510 | 115 | 3000 | 115 | 3550 | 115 | 4140 | 115 |
| 5.0 | 1510 | 120 | 1890 | 120 | 2330 | 120 | 2800 | 120 | 3330 | 120 | 3910 | 120 |
| 5.2 | 1390 | 125 | 1750 | 125 | 2160 | 125 | 2610 | 125 | 3120 | 125 | 3690 | 125 |
| 5.4 | 1280 | 130 | 1610 | 130 | 1990 | 130 | 2420 | 130 | 2910 | 130 | 3460 | 130 |
| 5.6 | 1160 | 134 | 1470 | 134 | 1830 | 134 | 2230 | 134 | 2700 | 134 | 3230 | 134 |
| 5.8 | 1040 | 139 | 1320 | 139 | 1650 | 139 | 2020 | 139 | 2460 | 139 | 2970 | 139 |
| 6.0 | 833 | 144 | 1060 | 144 | 1330 | 144 | 1660 | 144 | 2040 | 144 | 2500 | 144 |

[Return to Summary](#)

Table 3: High Speed, Four Lane Divided Roadways (w = 24 feet), $e_{\max} = 6\%$, NC = 2%

| (mph) (ft) e (%) | Design Speed | | | | | | | | | | | |
|------------------------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|
| | 50 | | 55 | | 60 | | 65 | | 70 | | 75 | |
| | x = 72 | | x = 72 | | x = 72 | | x = 72 | | x = 72 | | x = 72 | |
| | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) |
| NC | 7870 | ---- | 9410 | ---- | 11100 | ---- | 12600 | ---- | 14100 | ---- | 15700 | ---- |
| RC | 5700 | 72 | 6820 | 72 | 8060 | 72 | 9130 | 72 | 10300 | 72 | 11500 | 72 |
| 2.2 | 5100 | 79 | 6110 | 79 | 7230 | 79 | 8200 | 79 | 9240 | 79 | 10400 | 79 |
| 2.4 | 4600 | 86 | 5520 | 86 | 6540 | 86 | 7430 | 86 | 8380 | 86 | 9420 | 86 |
| 2.6 | 4170 | 94 | 5020 | 94 | 5950 | 94 | 6770 | 94 | 7660 | 94 | 8620 | 94 |
| 2.8 | 3800 | 101 | 4580 | 101 | 5440 | 101 | 6200 | 101 | 7030 | 101 | 7930 | 101 |
| 3.0 | 3480 | 108 | 4200 | 108 | 4990 | 108 | 5710 | 108 | 6490 | 108 | 7330 | 108 |
| 3.2 | 3200 | 115 | 3860 | 115 | 4600 | 115 | 5280 | 115 | 6010 | 115 | 6810 | 115 |
| 3.4 | 2940 | 122 | 3560 | 122 | 4250 | 122 | 4890 | 122 | 5580 | 122 | 6340 | 122 |
| 3.6 | 2710 | 130 | 3290 | 130 | 3940 | 130 | 4540 | 130 | 5210 | 130 | 5930 | 130 |
| 3.8 | 2490 | 137 | 3040 | 137 | 3650 | 137 | 4230 | 137 | 4860 | 137 | 5560 | 137 |
| 4.0 | 2300 | 144 | 2810 | 144 | 3390 | 144 | 3950 | 144 | 4550 | 144 | 5220 | 144 |
| 4.2 | 2110 | 151 | 2590 | 151 | 3140 | 151 | 3680 | 151 | 4270 | 151 | 4910 | 151 |
| 4.4 | 1940 | 158 | 2400 | 158 | 2920 | 158 | 3440 | 158 | 4010 | 158 | 4630 | 158 |
| 4.6 | 1780 | 166 | 2210 | 166 | 2710 | 166 | 3220 | 166 | 3770 | 166 | 4380 | 166 |
| 4.8 | 1640 | 173 | 2050 | 173 | 2510 | 173 | 3000 | 173 | 3550 | 173 | 4140 | 173 |
| 5.0 | 1510 | 180 | 1890 | 180 | 2330 | 180 | 2800 | 180 | 3330 | 180 | 3910 | 180 |
| 5.2 | 1390 | 187 | 1750 | 187 | 2160 | 187 | 2610 | 187 | 3120 | 187 | 3690 | 187 |
| 5.4 | 1280 | 194 | 1610 | 194 | 1990 | 194 | 2420 | 194 | 2910 | 194 | 3460 | 194 |
| 5.6 | 1160 | 202 | 1470 | 202 | 1830 | 202 | 2230 | 202 | 2700 | 202 | 3230 | 202 |
| 5.8 | 1040 | 209 | 1320 | 209 | 1650 | 209 | 2020 | 209 | 2460 | 209 | 2970 | 209 |
| 6.0 | 833 | 216 | 1060 | 216 | 1330 | 216 | 1660 | 216 | 2040 | 216 | 2500 | 216 |

[Return to Summary](#)

Table 4: High Speed, Six Lane Divided Roadways (w = 36 feet), $e_{\max} = 6\%$, NC = 2.5%

| (mph) (ft) e (%) | Design Speed | | | | | | | | | | | |
|------------------------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|
| | 50 | | 55 | | 60 | | 65 | | 70 | | 75 | |
| | x = 120 | | x = 120 | | x = 120 | | x = 120 | | x = 120 | | x = 120 | |
| | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) |
| NC | 7870 | ---- | 9410 | ---- | 11100 | ---- | 12600 | ---- | 14100 | ---- | 15700 | ---- |
| 2.0 | 5700 | 96 | 6820 | 96 | 8060 | 96 | 9130 | 96 | 10300 | 96 | 11500 | 96 |
| 2.2 | 5100 | 106 | 6110 | 106 | 7230 | 106 | 8200 | 106 | 9240 | 106 | 10400 | 106 |
| 2.4 | 4600 | 115 | 5520 | 115 | 6540 | 115 | 7430 | 115 | 8380 | 115 | 9420 | 115 |
| 2.6 | 4170 | 125 | 5020 | 125 | 5950 | 125 | 6770 | 125 | 7660 | 125 | 8620 | 125 |
| 2.8 | 3800 | 134 | 4580 | 134 | 5440 | 134 | 6200 | 134 | 7030 | 134 | 7930 | 134 |
| 3.0 | 3480 | 144 | 4200 | 144 | 4990 | 144 | 5710 | 144 | 6490 | 144 | 7330 | 144 |
| 3.2 | 3200 | 154 | 3860 | 154 | 4600 | 154 | 5280 | 154 | 6010 | 154 | 6810 | 154 |
| 3.4 | 2940 | 163 | 3560 | 163 | 4250 | 163 | 4890 | 163 | 5580 | 163 | 6340 | 163 |
| 3.6 | 2710 | 173 | 3290 | 173 | 3940 | 173 | 4540 | 173 | 5210 | 173 | 5930 | 173 |
| 3.8 | 2490 | 182 | 3040 | 182 | 3650 | 182 | 4230 | 182 | 4860 | 182 | 5560 | 182 |
| 4.0 | 2300 | 192 | 2810 | 192 | 3390 | 192 | 3950 | 192 | 4550 | 192 | 5220 | 192 |
| 4.2 | 2110 | 202 | 2590 | 202 | 3140 | 202 | 3680 | 202 | 4270 | 202 | 4910 | 202 |
| 4.4 | 1940 | 211 | 2400 | 211 | 2920 | 211 | 3440 | 211 | 4010 | 211 | 4630 | 211 |
| 4.6 | 1780 | 221 | 2210 | 221 | 2710 | 221 | 3220 | 221 | 3770 | 221 | 4380 | 221 |
| 4.8 | 1640 | 230 | 2050 | 230 | 2510 | 230 | 3000 | 230 | 3550 | 230 | 4140 | 230 |
| 5.0 | 1510 | 240 | 1890 | 240 | 2330 | 240 | 2800 | 240 | 3330 | 240 | 3910 | 240 |
| 5.2 | 1390 | 250 | 1750 | 250 | 2160 | 250 | 2610 | 250 | 3120 | 250 | 3690 | 250 |
| 5.4 | 1280 | 259 | 1610 | 259 | 1990 | 259 | 2420 | 259 | 2910 | 259 | 3460 | 259 |
| 5.6 | 1160 | 269 | 1470 | 269 | 1830 | 269 | 2230 | 269 | 2700 | 269 | 3230 | 269 |
| 5.8 | 1040 | 278 | 1320 | 278 | 1650 | 278 | 2020 | 278 | 2460 | 278 | 2970 | 278 |
| 6.0 | 833 | 288 | 1060 | 288 | 1330 | 288 | 1660 | 288 | 2040 | 288 | 2500 | 288 |

[Return to Summary](#)

Table 5: High Speed, Eight Lane Divided Roadways (w = 48 feet), $e_{\max} = 6\%$, NC = 2.5%

| (mph) (ft) e (%) | Design Speed | | | | | | | | | | | |
|------------------------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|
| | 50 | | 55 | | 60 | | 65 | | 70 | | 75 | |
| | x = 150 | | x = 150 | | x = 150 | | x = 150 | | x = 150 | | x = 150 | |
| | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) |
| NC | 7870 | ---- | 9410 | ---- | 11100 | ---- | 12600 | ---- | 14100 | ---- | 15700 | ---- |
| 2.0 | 5700 | 120 | 6820 | 120 | 8060 | 120 | 9130 | 120 | 10300 | 120 | 11500 | 120 |
| 2.2 | 5100 | 132 | 6110 | 132 | 7230 | 132 | 8200 | 132 | 9240 | 132 | 10400 | 132 |
| 2.4 | 4600 | 144 | 5520 | 144 | 6540 | 144 | 7430 | 144 | 8380 | 144 | 9420 | 144 |
| 2.6 | 4170 | 156 | 5020 | 156 | 5950 | 156 | 6770 | 156 | 7660 | 156 | 8620 | 156 |
| 2.8 | 3800 | 168 | 4580 | 168 | 5440 | 168 | 6200 | 168 | 7030 | 168 | 7930 | 168 |
| 3.0 | 3480 | 180 | 4200 | 180 | 4990 | 180 | 5710 | 180 | 6490 | 180 | 7330 | 180 |
| 3.2 | 3200 | 192 | 3860 | 192 | 4600 | 192 | 5280 | 192 | 6010 | 192 | 6810 | 192 |
| 3.4 | 2940 | 204 | 3560 | 204 | 4250 | 204 | 4890 | 204 | 5580 | 204 | 6340 | 204 |
| 3.6 | 2710 | 216 | 3290 | 216 | 3940 | 216 | 4540 | 216 | 5210 | 216 | 5930 | 216 |
| 3.8 | 2490 | 228 | 3040 | 228 | 3650 | 228 | 4230 | 228 | 4860 | 228 | 5560 | 228 |
| 4.0 | 2300 | 240 | 2810 | 240 | 3390 | 240 | 3950 | 240 | 4550 | 240 | 5220 | 240 |
| 4.2 | 2110 | 252 | 2590 | 252 | 3140 | 252 | 3680 | 252 | 4270 | 252 | 4910 | 252 |
| 4.4 | 1940 | 264 | 2400 | 264 | 2920 | 264 | 3440 | 264 | 4010 | 264 | 4630 | 264 |
| 4.6 | 1780 | 276 | 2210 | 276 | 2710 | 276 | 3220 | 276 | 3770 | 276 | 4380 | 276 |
| 4.8 | 1640 | 288 | 2050 | 288 | 2510 | 288 | 3000 | 288 | 3550 | 288 | 4140 | 288 |
| 5.0 | 1510 | 300 | 1890 | 300 | 2330 | 300 | 2800 | 300 | 3330 | 300 | 3910 | 300 |
| 5.2 | 1390 | 312 | 1750 | 312 | 2160 | 312 | 2610 | 312 | 3120 | 312 | 3690 | 312 |
| 5.4 | 1280 | 324 | 1610 | 324 | 1990 | 324 | 2420 | 324 | 2910 | 324 | 3460 | 324 |
| 5.6 | 1160 | 336 | 1470 | 336 | 1830 | 336 | 2230 | 336 | 2700 | 336 | 3230 | 336 |
| 5.8 | 1040 | 348 | 1320 | 348 | 1650 | 348 | 2020 | 348 | 2460 | 348 | 2970 | 348 |
| 6.0 | 833 | 360 | 1060 | 360 | 1330 | 360 | 1660 | 360 | 2040 | 360 | 2500 | 360 |

[Return to Summary](#)

Table 6: Ramps (w = 16 feet) and Loops (w = 18 feet), $e_{\max} = 6\%$, NC = 2%

| | Design Speed | | | | | | | | | | | | | |
|-------|--------------|--------|-------------|--------|-------------|--------|-------------|--------|-------------|--------|-------------|--------|--------------|---------|
| (mph) | 30 | | 35 | | 40 | | 45 | | 50 | | 55 | | 60 | |
| (ft) | x = 42 | | x = 46 | | x = 49 | | x = 53 | | x = 56 | | x = 56 | | x = 56 | |
| e (%) | Radius (ft.) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft.) | L (ft.) |
| NC | 3130 | ---- | 4100 | ---- | 5230 | ---- | 6480 | ---- | 7870 | ---- | 9410 | ---- | 11100 | ---- |
| RC | 2240 | 42 | 2950 | 46 | 3770 | 49 | 4680 | 53 | 5700 | 56 | 6820 | 56 | 8060 | 56 |
| 2.2 | 2000 | 46 | 2630 | 50 | 3370 | 54 | 4190 | 58 | 5100 | 62 | 6110 | 62 | 7230 | 62 |
| 2.4 | 1790 | 50 | 2360 | 55 | 3030 | 59 | 3770 | 63 | 4600 | 67 | 5520 | 67 | 6540 | 67 |
| 2.6 | 1610 | 55 | 2130 | 59 | 2740 | 64 | 3420 | 68 | 4170 | 73 | 5020 | 73 | 5950 | 73 |
| 2.8 | 1460 | 59 | 1930 | 64 | 2490 | 69 | 3110 | 74 | 3800 | 78 | 4580 | 78 | 5440 | 78 |
| 3.0 | 1320 | 63 | 1760 | 68 | 2270 | 74 | 2840 | 79 | 3480 | 84 | 4200 | 84 | 4990 | 84 |
| 3.2 | 1200 | 67 | 1600 | 73 | 2080 | 78 | 2600 | 84 | 3200 | 90 | 3860 | 90 | 4600 | 90 |
| 3.4 | 1080 | 71 | 1460 | 77 | 1900 | 83 | 2390 | 89 | 2940 | 95 | 3560 | 95 | 4250 | 95 |
| 3.6 | 972 | 76 | 1320 | 82 | 1740 | 88 | 2190 | 95 | 2710 | 101 | 3290 | 101 | 3940 | 101 |
| 3.8 | 864 | 80 | 1190 | 86 | 1590 | 93 | 2010 | 100 | 2490 | 106 | 3040 | 106 | 3650 | 106 |
| 4.0 | 766 | 84 | 1070 | 91 | 1440 | 98 | 1840 | 105 | 2300 | 112 | 2810 | 112 | 3390 | 112 |
| 4.2 | 684 | 88 | 960 | 96 | 1310 | 103 | 1680 | 110 | 2110 | 118 | 2590 | 118 | 3140 | 118 |
| 4.4 | 615 | 92 | 868 | 100 | 1190 | 108 | 1540 | 116 | 1940 | 123 | 2400 | 123 | 2920 | 123 |
| 4.6 | 555 | 97 | 788 | 105 | 1090 | 113 | 1410 | 121 | 1780 | 129 | 2210 | 129 | 2710 | 129 |
| 4.8 | 502 | 101 | 718 | 109 | 995 | 118 | 1300 | 126 | 1640 | 134 | 2050 | 134 | 2510 | 134 |
| 5.0 | 456 | 105 | 654 | 114 | 911 | 123 | 1190 | 131 | 1510 | 140 | 1890 | 140 | 2330 | 140 |
| 5.2 | 413 | 109 | 595 | 118 | 833 | 127 | 1090 | 137 | 1390 | 146 | 1750 | 146 | 2160 | 146 |
| 5.4 | 373 | 113 | 540 | 123 | 759 | 132 | 995 | 142 | 1280 | 151 | 1610 | 151 | 1990 | 151 |
| 5.6 | 335 | 118 | 487 | 127 | 687 | 137 | 903 | 147 | 1160 | 157 | 1470 | 157 | 1830 | 157 |
| 5.8 | 296 | 122 | 431 | 132 | 611 | 142 | 806 | 152 | 1040 | 162 | 1320 | 162 | 1650 | 162 |
| 6.0 | 231 | 126 | 340 | 137 | 485 | 147 | 643 | 158 | 833 | 168 | 1060 | 168 | 1330 | 168 |

*Note: Pavement width of 16' will not accommodate offtracking if radius is less than 250'

| Design Speed | Radius | Width | L | x |
|--------------|--------|-------|------|------|
| (mph) | (ft) | (ft) | (ft) | (ft) |
| 25 | 150 | 18 | 99 | 33 |
| 30 | 250 | 18 | 108 | 36 |
| 35 | 350 | 16 | 136 | 46 |

[Return to Summary](#)

Table 7: Ramps (w = 24 feet), $e_{\max} = 6\%$, NC = 2%

| | Design Speed | | | | | | | | | | | | | |
|-------|--------------|--------|-------------|--------|-------------|--------|-------------|--------|-------------|--------|-------------|--------|--------------|---------|
| (mph) | 30 | | 35 | | 40 | | 45 | | 50 | | 55 | | 60 | |
| (ft) | x = 54 | | x = 59 | | x = 63 | | x = 68 | | x = 72 | | x = 72 | | x = 72 | |
| e (%) | Radius (ft.) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft.) | L (ft.) |
| NC | 3130 | ---- | 4100 | ---- | 5230 | ---- | 6480 | ---- | 7870 | ---- | 9410 | ---- | 11100 | ---- |
| RC | 2240 | 54 | 2950 | 59 | 3770 | 63 | 4680 | 68 | 5700 | 72 | 6820 | 72 | 8060 | 72 |
| 2.2 | 2000 | 59 | 2630 | 64 | 3370 | 69 | 4190 | 74 | 5100 | 79 | 6110 | 79 | 7230 | 79 |
| 2.4 | 1790 | 65 | 2360 | 70 | 3030 | 76 | 3770 | 81 | 4600 | 86 | 5520 | 86 | 6540 | 86 |
| 2.6 | 1610 | 70 | 2130 | 76 | 2740 | 82 | 3420 | 88 | 4170 | 94 | 5020 | 94 | 5950 | 94 |
| 2.8 | 1460 | 76 | 1930 | 82 | 2490 | 88 | 3110 | 95 | 3800 | 101 | 4580 | 101 | 5440 | 101 |
| 3.0 | 1320 | 81 | 1760 | 88 | 2270 | 95 | 2840 | 101 | 3480 | 108 | 4200 | 108 | 4990 | 108 |
| 3.2 | 1200 | 86 | 1600 | 94 | 2080 | 101 | 2600 | 108 | 3200 | 115 | 3860 | 115 | 4600 | 115 |
| 3.4 | 1080 | 92 | 1460 | 99 | 1900 | 107 | 2390 | 115 | 2940 | 122 | 3560 | 122 | 4250 | 122 |
| 3.6 | 972 | 97 | 1320 | 105 | 1740 | 113 | 2190 | 122 | 2710 | 130 | 3290 | 130 | 3940 | 130 |
| 3.8 | 864 | 103 | 1190 | 111 | 1590 | 120 | 2010 | 128 | 2490 | 137 | 3040 | 137 | 3650 | 137 |
| 4.0 | 766 | 108 | 1070 | 117 | 1440 | 126 | 1840 | 135 | 2300 | 144 | 2810 | 144 | 3390 | 144 |
| 4.2 | 684 | 113 | 960 | 123 | 1310 | 132 | 1680 | 142 | 2110 | 151 | 2590 | 151 | 3140 | 151 |
| 4.4 | 615 | 119 | 868 | 129 | 1190 | 139 | 1540 | 149 | 1940 | 158 | 2400 | 158 | 2920 | 158 |
| 4.6 | 555 | 124 | 788 | 135 | 1090 | 145 | 1410 | 155 | 1780 | 166 | 2210 | 166 | 2710 | 166 |
| 4.8 | 502 | 130 | 718 | 140 | 995 | 151 | 1300 | 162 | 1640 | 173 | 2050 | 173 | 2510 | 173 |
| 5.0 | 456 | 135 | 654 | 146 | 911 | 158 | 1190 | 169 | 1510 | 180 | 1890 | 180 | 2330 | 180 |
| 5.2 | 413 | 140 | 595 | 152 | 833 | 164 | 1090 | 176 | 1390 | 187 | 1750 | 187 | 2160 | 187 |
| 5.4 | 373 | 146 | 540 | 158 | 759 | 170 | 995 | 182 | 1280 | 194 | 1610 | 194 | 1990 | 194 |
| 5.6 | 335 | 151 | 487 | 164 | 687 | 176 | 903 | 189 | 1160 | 202 | 1470 | 202 | 1830 | 202 |
| 5.8 | 296 | 157 | 431 | 170 | 611 | 183 | 806 | 196 | 1040 | 209 | 1320 | 209 | 1650 | 209 |
| 6.0 | 231 | 162 | 340 | 176 | 485 | 189 | 643 | 203 | 833 | 216 | 1060 | 216 | 1330 | 216 |

[Return to Summary](#)

Table 8: Low Speed Roadways (w = 12 feet), $e_{\max} = 8\%$, NC = 2%

| (mph) (ft) | Design Speed | | | | | | | | | |
|---------------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|
| | 25 | | 30 | | 35 | | 40 | | 45 | |
| | x = 33 | | x = 36 | | x = 39 | | x = 42 | | x = 45 | |
| e (%) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) |
| NC | 2370 | --- | 3240 | --- | 4260 | --- | 5410 | --- | 6710 | --- |
| RC | 1720 | 33 | 2370 | 36 | 3120 | 39 | 3970 | 42 | 4930 | 45 |
| 2.2 | 1550 | 36 | 2130 | 40 | 2800 | 43 | 3570 | 46 | 4440 | 50 |
| 2.4 | 1400 | 40 | 1930 | 43 | 2540 | 47 | 3240 | 50 | 4030 | 54 |
| 2.6 | 1280 | 43 | 1760 | 47 | 2320 | 51 | 2960 | 55 | 3690 | 59 |
| 2.8 | 1170 | 46 | 1610 | 50 | 2130 | 55 | 2720 | 59 | 3390 | 63 |
| 3.0 | 1070 | 50 | 1480 | 54 | 1960 | 59 | 2510 | 63 | 3130 | 68 |
| 3.2 | 985 | 53 | 1370 | 58 | 1820 | 62 | 2330 | 67 | 2900 | 72 |
| 3.4 | 911 | 56 | 1270 | 61 | 1690 | 66 | 2170 | 71 | 2700 | 77 |
| 3.6 | 845 | 59 | 1180 | 65 | 1570 | 70 | 2020 | 76 | 2520 | 81 |
| 3.8 | 784 | 63 | 1100 | 68 | 1470 | 74 | 1890 | 80 | 2360 | 86 |
| 4.0 | 729 | 66 | 1030 | 72 | 1370 | 78 | 1770 | 84 | 2220 | 90 |
| 4.2 | 678 | 69 | 955 | 76 | 1280 | 82 | 1660 | 88 | 2080 | 95 |
| 4.4 | 630 | 73 | 893 | 79 | 1200 | 86 | 1560 | 92 | 1960 | 99 |
| 4.6 | 585 | 76 | 834 | 83 | 1130 | 90 | 1470 | 97 | 1850 | 104 |
| 4.8 | 542 | 79 | 779 | 86 | 1060 | 94 | 1390 | 101 | 1750 | 108 |
| 5.0 | 499 | 83 | 727 | 90 | 991 | 98 | 1310 | 105 | 1650 | 113 |
| 5.2 | 457 | 86 | 676 | 94 | 929 | 101 | 1230 | 109 | 1560 | 117 |
| 5.4 | 420 | 89 | 627 | 97 | 870 | 105 | 1160 | 113 | 1480 | 122 |
| 5.6 | 387 | 92 | 582 | 101 | 813 | 109 | 1090 | 118 | 1390 | 126 |
| 5.8 | 358 | 96 | 542 | 104 | 761 | 113 | 1030 | 122 | 1320 | 131 |
| 6.0 | 332 | 99 | 506 | 108 | 713 | 117 | 965 | 126 | 1250 | 135 |
| 6.2 | 308 | 102 | 472 | 112 | 669 | 121 | 909 | 130 | 1180 | 140 |
| 6.4 | 287 | 106 | 442 | 115 | 628 | 125 | 857 | 135 | 1110 | 144 |
| 6.6 | 267 | 109 | 413 | 119 | 590 | 129 | 808 | 139 | 1050 | 149 |
| 6.8 | 248 | 112 | 386 | 122 | 553 | 133 | 761 | 143 | 990 | 153 |
| 7.0 | 231 | 116 | 360 | 126 | 518 | 137 | 716 | 147 | 933 | 158 |
| 7.2 | 214 | 119 | 336 | 130 | 485 | 140 | 672 | 151 | 878 | 162 |
| 7.4 | 198 | 122 | 312 | 133 | 451 | 144 | 628 | 156 | 822 | 167 |
| 7.6 | 182 | 125 | 287 | 137 | 417 | 148 | 583 | 160 | 765 | 171 |
| 7.8 | 164 | 129 | 261 | 140 | 380 | 152 | 533 | 164 | 701 | 176 |
| 8.0 | 134 | 132 | 214 | 144 | 314 | 156 | 444 | 168 | 587 | 180 |

[Return to Summary](#)

Table 9: High Speed Roadways (w = 12 feet), $e_{\max} = 8\%$, NC = 2%

| | Design Speed | | | | | | | | | | | |
|-------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|
| (mph) | 50 | | 55 | | 60 | | 65 | | 70 | | 75 | |
| (ft) | x = 48 | | x = 48 | | x = 48 | | x = 48 | | x = 48 | | x = 48 | |
| e (%) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) | Radius (ft) | L (ft) |
| NC | 8150 | --- | 9720 | --- | 11500 | --- | 12900 | --- | 14500 | --- | 16100 | --- |
| RC | 5990 | 48 | 7150 | 48 | 8440 | 48 | 9510 | 48 | 10700 | 48 | 12000 | 48 |
| 2.2 | 5400 | 53 | 6450 | 53 | 7620 | 53 | 8600 | 53 | 9660 | 53 | 10800 | 53 |
| 2.4 | 4910 | 58 | 5870 | 58 | 6930 | 58 | 7830 | 58 | 8810 | 58 | 9850 | 58 |
| 2.6 | 4490 | 62 | 5370 | 62 | 6350 | 62 | 7180 | 62 | 8090 | 62 | 9050 | 62 |
| 2.8 | 4130 | 67 | 4950 | 67 | 5850 | 67 | 6630 | 67 | 7470 | 67 | 8370 | 67 |
| 3.0 | 3820 | 72 | 4580 | 72 | 5420 | 72 | 6140 | 72 | 6930 | 72 | 7780 | 72 |
| 3.2 | 3550 | 77 | 4250 | 77 | 5040 | 77 | 5720 | 77 | 6460 | 77 | 7260 | 77 |
| 3.4 | 3300 | 82 | 3970 | 82 | 4700 | 82 | 5350 | 82 | 6050 | 82 | 6800 | 82 |
| 3.6 | 3090 | 86 | 3710 | 86 | 4400 | 86 | 5010 | 86 | 5680 | 86 | 6400 | 86 |
| 3.8 | 2890 | 91 | 3480 | 91 | 4140 | 91 | 4710 | 91 | 5350 | 91 | 6030 | 91 |
| 4.0 | 2720 | 96 | 3270 | 96 | 3890 | 96 | 4450 | 96 | 5050 | 96 | 5710 | 96 |
| 4.2 | 2560 | 101 | 3080 | 101 | 3670 | 101 | 4200 | 101 | 4780 | 101 | 5410 | 101 |
| 4.4 | 2410 | 106 | 2910 | 106 | 3470 | 106 | 3980 | 106 | 4540 | 106 | 5140 | 106 |
| 4.6 | 2280 | 110 | 2750 | 110 | 3290 | 110 | 3770 | 110 | 4310 | 110 | 4890 | 110 |
| 4.8 | 2160 | 115 | 2610 | 115 | 3120 | 115 | 3590 | 115 | 4100 | 115 | 4670 | 115 |
| 5.0 | 2040 | 120 | 2470 | 120 | 2960 | 120 | 3410 | 120 | 3910 | 120 | 4460 | 120 |
| 5.2 | 1930 | 125 | 2350 | 125 | 2820 | 125 | 3250 | 125 | 3740 | 125 | 4260 | 125 |
| 5.4 | 1830 | 130 | 2230 | 130 | 2680 | 130 | 3110 | 130 | 3570 | 130 | 4090 | 130 |
| 5.6 | 1740 | 134 | 2120 | 134 | 2550 | 134 | 2970 | 134 | 3420 | 134 | 3920 | 134 |
| 5.8 | 1650 | 139 | 2010 | 139 | 2430 | 139 | 2840 | 139 | 3280 | 139 | 3760 | 139 |
| 6.0 | 1560 | 144 | 1920 | 144 | 2320 | 144 | 2710 | 144 | 3150 | 144 | 3620 | 144 |
| 6.2 | 1480 | 149 | 1820 | 149 | 2210 | 149 | 2600 | 149 | 3020 | 149 | 3480 | 149 |
| 6.4 | 1400 | 154 | 1730 | 154 | 2110 | 154 | 2490 | 154 | 2910 | 154 | 3360 | 154 |
| 6.6 | 1330 | 158 | 1650 | 158 | 2010 | 158 | 2380 | 158 | 2790 | 158 | 3240 | 158 |
| 6.8 | 1260 | 163 | 1560 | 163 | 1910 | 163 | 2280 | 163 | 2690 | 163 | 3120 | 163 |
| 7.0 | 1190 | 168 | 1480 | 168 | 1820 | 168 | 2180 | 168 | 2580 | 168 | 3010 | 168 |
| 7.2 | 1120 | 173 | 1400 | 173 | 1720 | 173 | 2070 | 173 | 2470 | 173 | 2900 | 173 |
| 7.4 | 1060 | 178 | 1320 | 178 | 1630 | 178 | 1970 | 178 | 2350 | 178 | 2780 | 178 |
| 7.6 | 980 | 182 | 1230 | 182 | 1530 | 182 | 1850 | 182 | 2230 | 182 | 2650 | 182 |
| 7.8 | 901 | 187 | 1140 | 187 | 1410 | 187 | 1720 | 187 | 2090 | 187 | 2500 | 187 |
| 8.0 | 758 | 192 | 960 | 192 | 1200 | 192 | 1480 | 192 | 1810 | 192 | 2210 | 192 |

[Return to Summary](#)

Table 10: Minimum Radii, Low Speed Roadway

| (mph) e (%) | Design Speed | | | | |
|----------------|--------------|--------------|--------------|--------------|--------------|
| | 25 R (ft) | 30 R (ft) | 35 R (ft) | 40 R (ft) | 45 R (ft) |
| -2.0 | 198 | 333 | 510 | 762 | 1039 |
| -1.5 | 194 | 324 | 495 | 736 | 1000 |
| 0.0 | 181 | 300 | 454 | 667 | 900 |
| 1.5 | 170 | 279 | 419 | 610 | 818 |
| 2.0 | 167 | 273 | 408 | 593 | 794 |
| 2.2 | 165 | 270 | 404 | 586 | 785 |
| 2.4 | 164 | 268 | 400 | 580 | 776 |
| 2.6 | 163 | 265 | 396 | 573 | 767 |
| 2.8 | 161 | 263 | 393 | 567 | 758 |
| 3.0 | 160 | 261 | 389 | 561 | 750 |
| 3.2 | 159 | 259 | 385 | 556 | 742 |
| 3.4 | 158 | 256 | 382 | 550 | 734 |
| 3.6 | 157 | 254 | 378 | 544 | 726 |
| 3.8 | 155 | 252 | 375 | 539 | 718 |
| 4.0 | 154 | 250 | 371 | 533 | 711 |

Note: Superelevation may be optional on low speed roadways.



Transition design from a normal crown roadway to a superelevated roadway for low speed roadways using Method 2 distribution for side friction and superelevation is the same as high speed roadways. See Section 2B-2 for distribution details.

[Return to Summary](#)

Chronology of Changes to Design Manual Section:

002B Superelevation

8/29/2024

NEW

Combined Sections 2A-2, 2A-3 and 2A-4. Reformatted Superelevation tables. Updated Superelevation tables to reflect changes in Greenbook2018GDHS-7-Errata.