
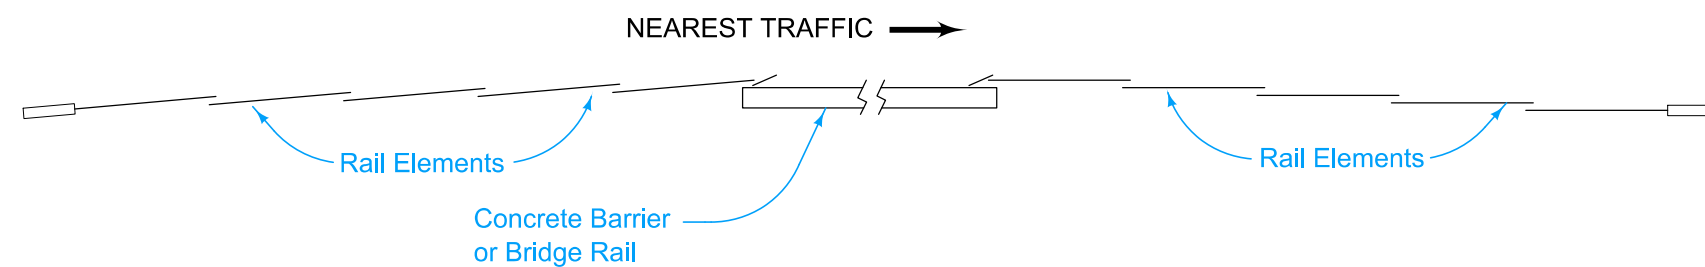


Install delineators and object markers according to SI-211.


For grading requirements, see EW-301.

For general guardrail details, see BA-200.

- ① See BA-221.
- ② See BA-202 for connections to concrete barriers and bridge rail end sections.
- ③ See BA-225.
- ④ When design speed is less than 55mph 10:1 flare may be used. For 12.5 feet longitudinally the offset will be 15 inches.

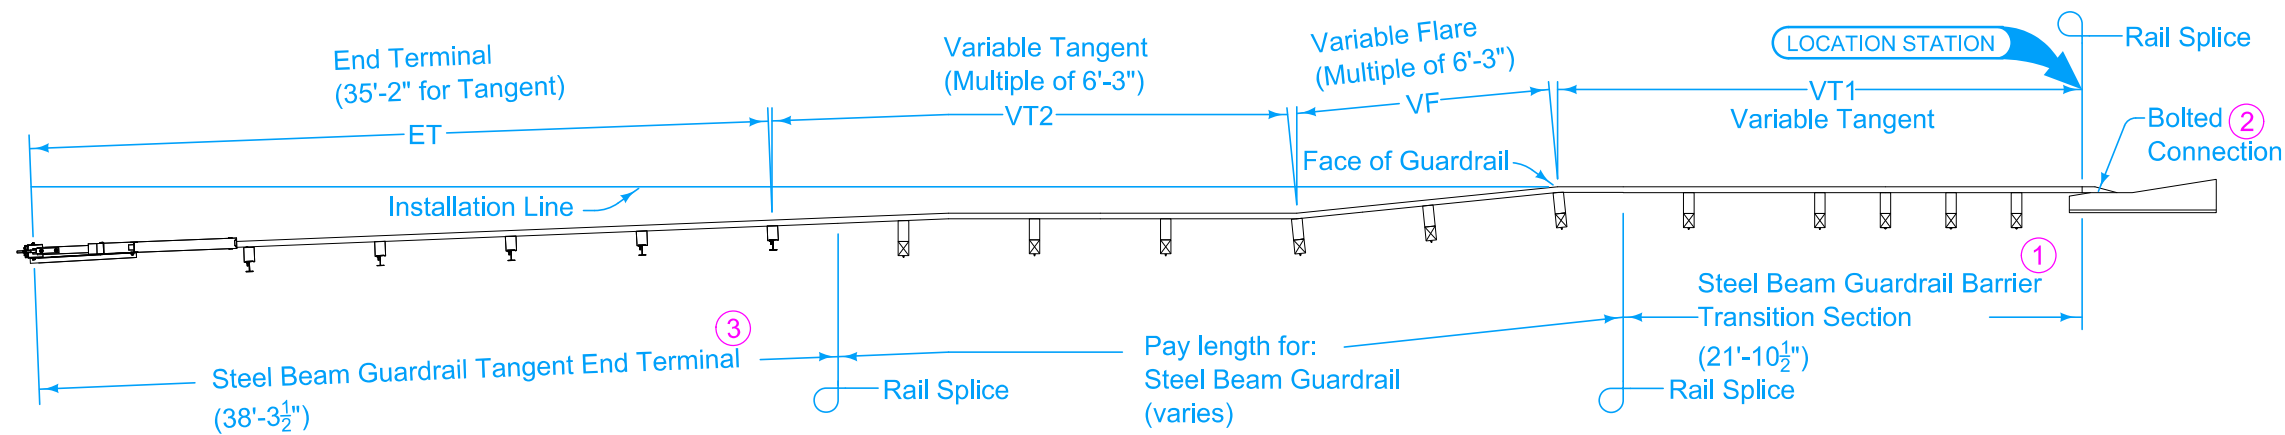


LAPPING PROCEDURE

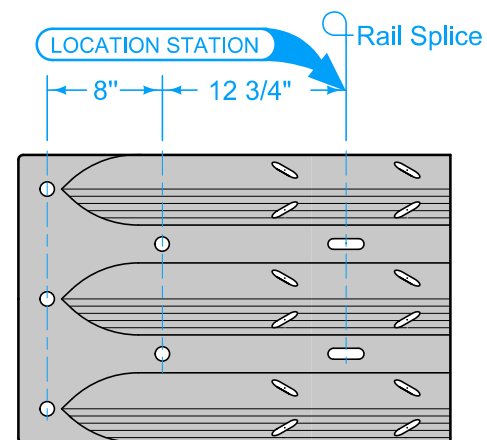

ELEVATION

THREE-BEAM
TERMINAL CONNECTOR

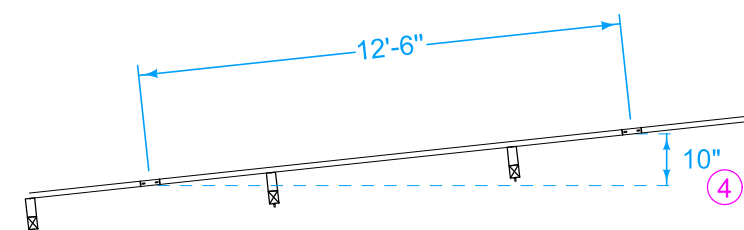

VARIABLE FLARE

Possible Contract Items:

- Steel Beam Guardrail
- Steel Beam Guardrail Barrier Transition Section, BA-221
- Steel Beam Guardrail End Anchor, Bolted
- Steel Beam Guardrail Tangent End Terminal, BA-225

Possible Tabulation:

108-8A

 STANDARD ROAD PLAN	REVISION	
	3	10-20-26
	BA-260	
SHEET 1 of 1		
REVISIONS: Changed location of location station.		
 APPROVED BY DESIGN METHODS ENGINEER		
STEEL BEAM GUARDRAIL INSTALLATION AT CONCRETE BARRIER OR BRIDGE RAIL END SECTION (MASH TL-2)		